








# Groovy DSL

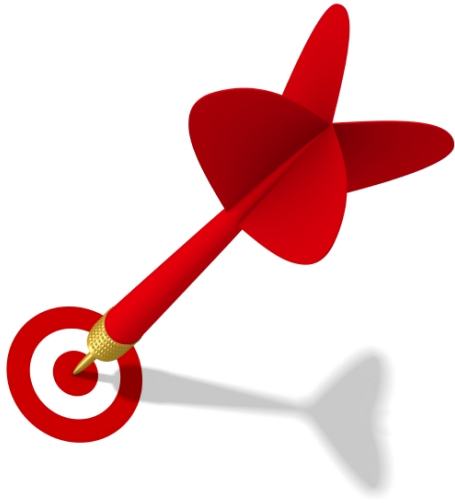

**All Ant**

**Ivy**


```
target(name:"description"){  
    //do build stuff  
}
```

```
Ant.echo(message:"hello")
```

```
setDefaultTarget(name)
```

```
depends(name)
```

```
includeTool << gant.tools.Ivy  
Ivy.settings(file:"file")  
Ivy.retrieve()
```

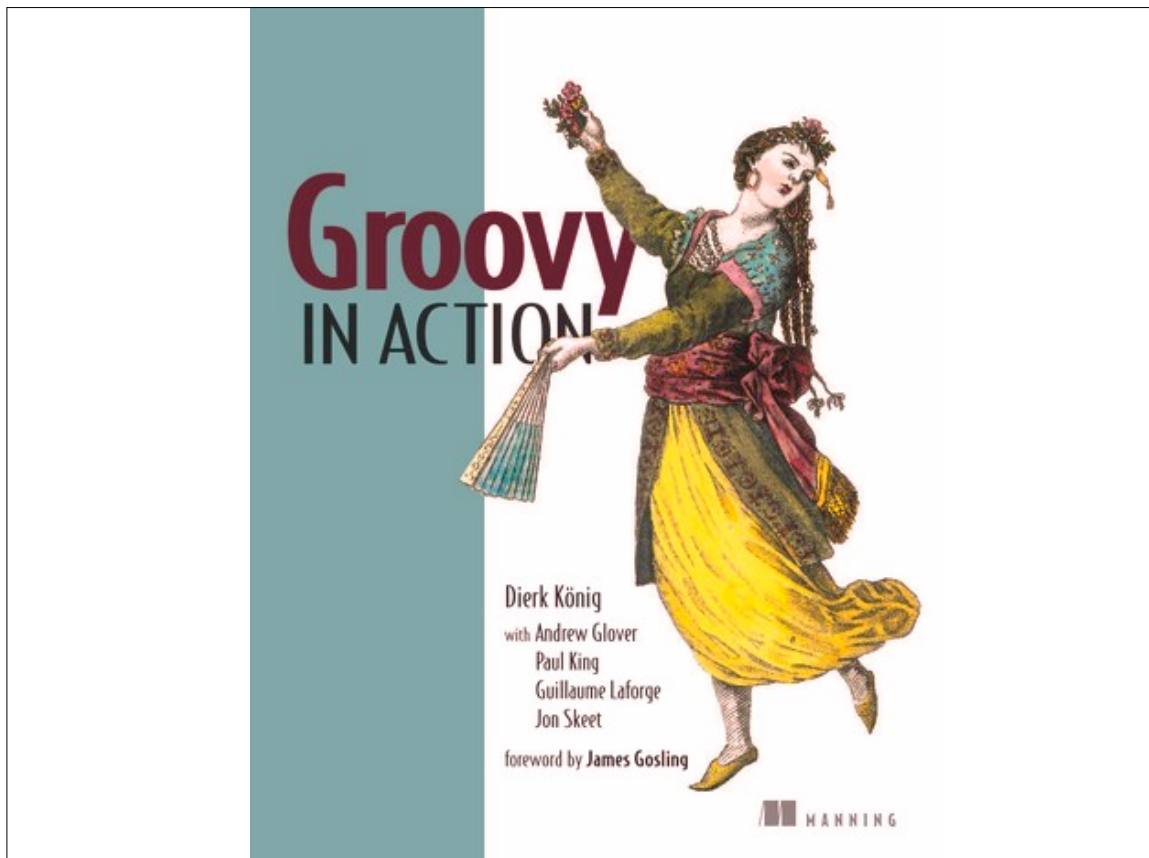

[groovy.codehaus.org](http://groovy.codehaus.org)

[aboutgroovy.com](http://aboutgroovy.com)

[groovy.dzone.com](http://groovy.dzone.com)

[groovyblogs.org](http://groovyblogs.org)

**[aglover@stelligent.com](mailto:aglover@stelligent.com)**



**[thediscoblog.com](http://thediscoblog.com)**

**[testearly.com](http://testearly.com)**